# RIO




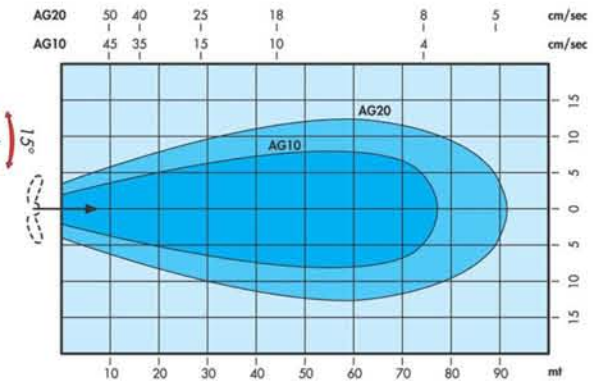

| MODELS | | kW absorbed | | Nominal power | | rpm/1' | Reduction ratio | Propeller models | Weight (motor only) |
|---|---|---|---|---|---|---|---|---|---|
| Single-phase 220V-50Hz | Three-phase 380V-50Hz | Single-phase kW | Three-phase kW | Single-phase HP | Three-phase HP | | | | kg |
| RIO Bravo AG10M | RIO Bravo AG10T | 1,5 | 1,5 | 1 | 1 | 123 | 1/11,35 | 3/740 | 38 |
| RIO Grande AG20M | RIO Grande AG20T | 2,6 | 2,6 | 2 | 2 | 115 | 1/12,15 | 3/930 | 42 |

# BRIO

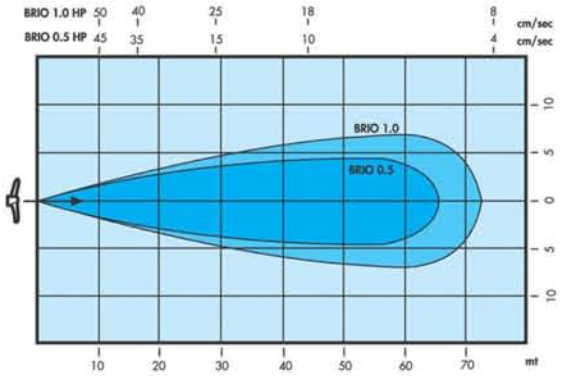


| MODELS | | kW absorbed | | Nominal power | | rpm/1' | Weight (motor only) |
|---|---|---|---|---|---|---|---|
| Single-phase 220V-50Hz | Three-phase 380V-50Hz | Single-phase kW | Three-phase kW | Single-phase HP | Three-phase HP | | kg |
| BRIO 0,5M | BRIO 0,5T | 0,6 | 0,6 | 0,5 | 0,5 | 1400 | 13 |
| BRIO 1M | BRIO 1T | 1,2 | 1,2 | 1 | 1 | 1400 | 20 |

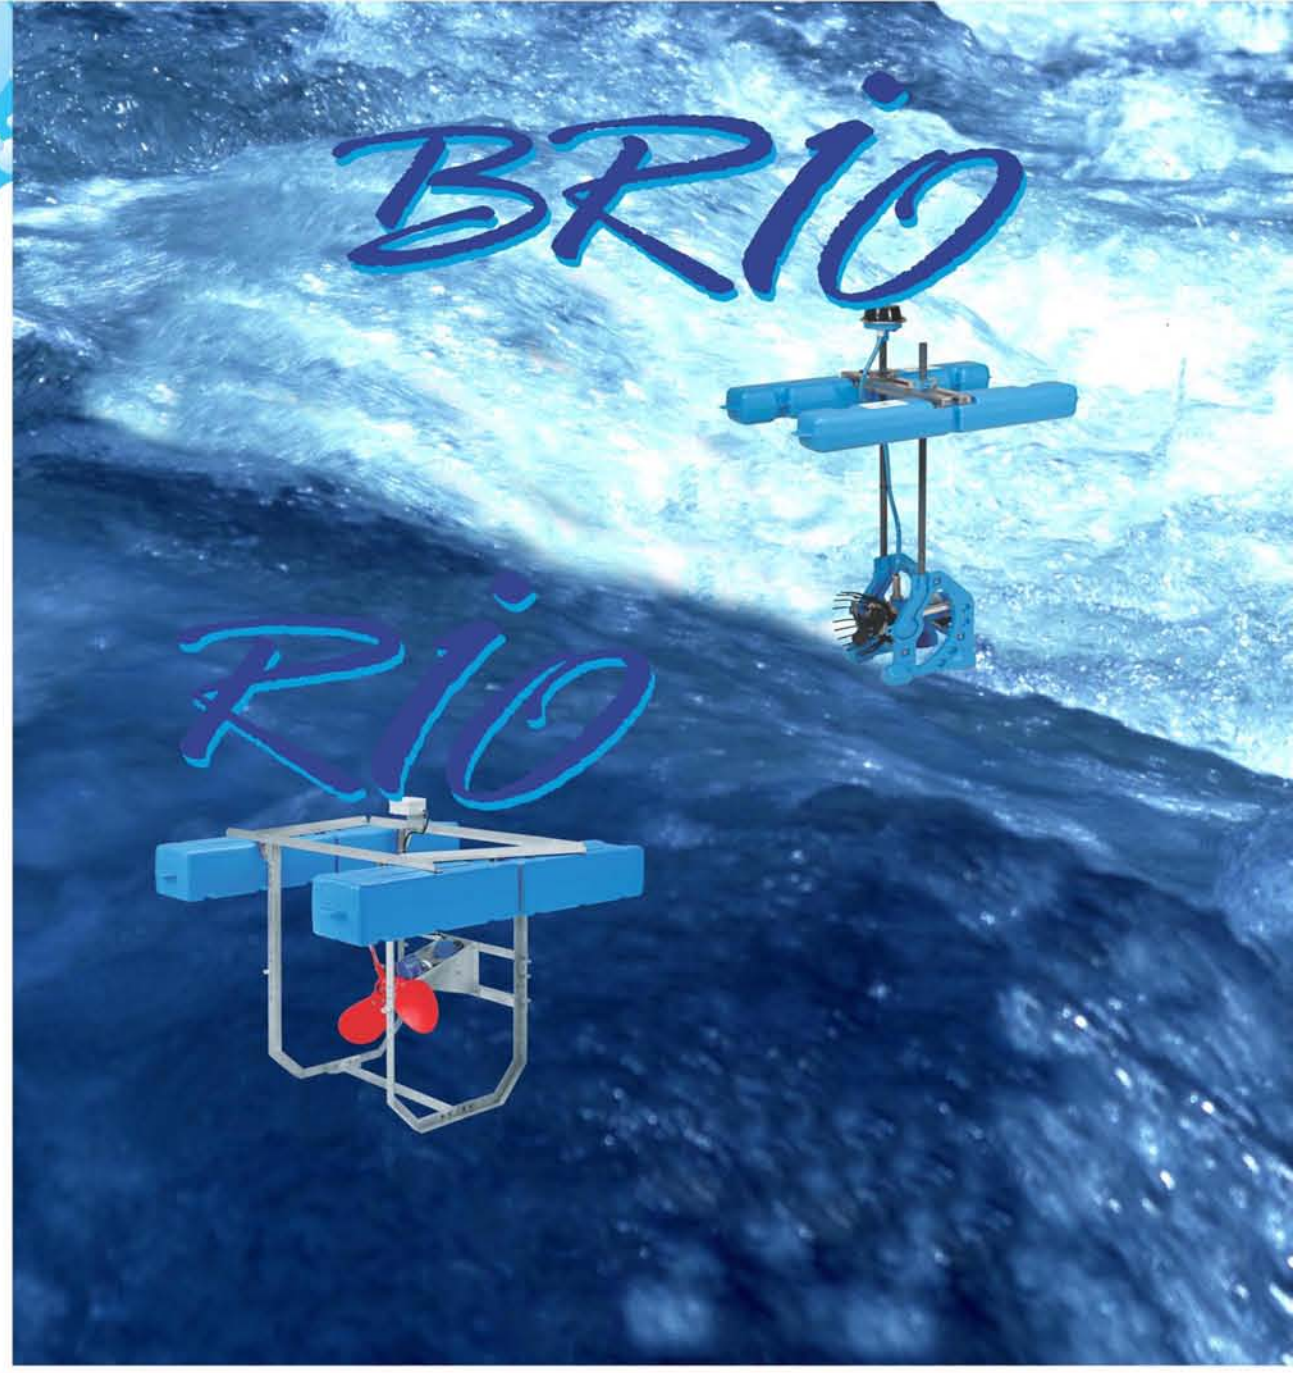


AUTHORIZED DEALER

Description, technical data and features are not binding.
The company reserves the right to carry out any modification without notice.

acqua&co®

Via Augera, 5/A - 42023 Cadelbosco Sopra (Reggio Emilia) - ITALY
(++39) 0522 919121/22 - Fax (++39) 0522 918790 - E.mail: acquaeco@tin.it - Internet: www.acquaeco.it

acqua&co®

# destratify, let circulate, oxigenate, improve water quality and soil

## BRIO

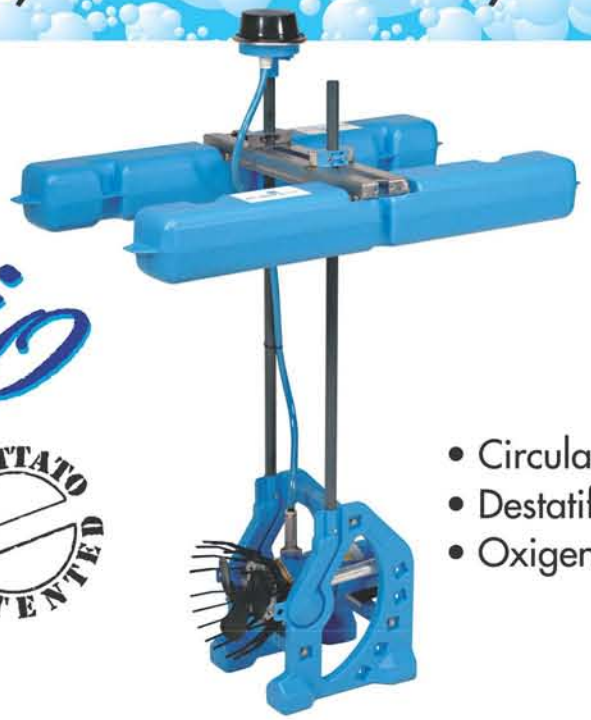

BREVETTATO PATENTED

- Circulation
- Destatification
- Oxigenation

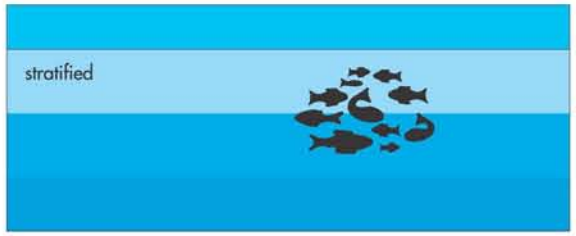


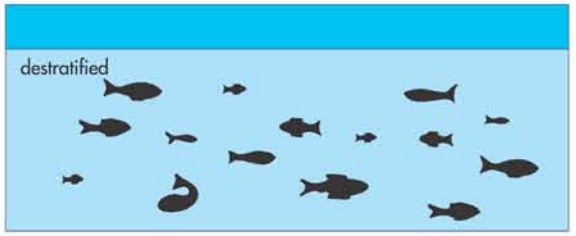


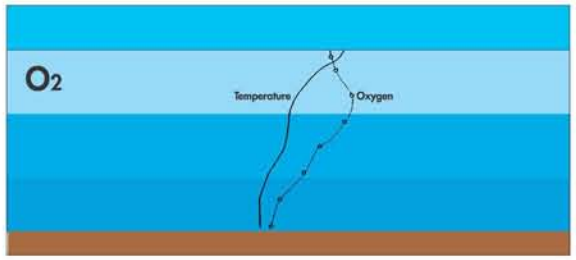


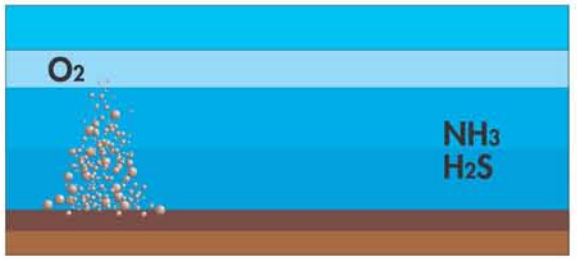


## RIO

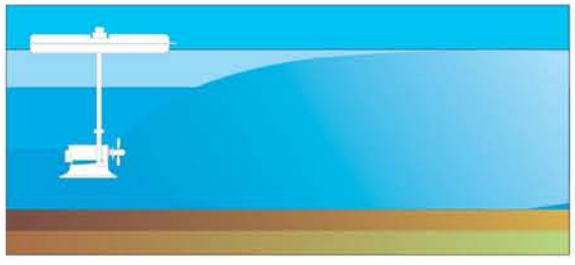

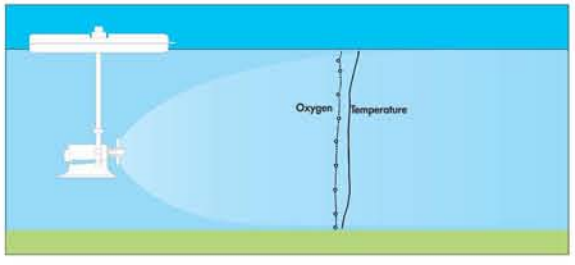

| MODELS Single-phase 220V-50Hz | Three-phase 380V-50Hz | Overall dimensions width.x length.x height. mm | Standard immersion mm | Adjustable immersion dept mm | Weight kg |
|---|---|---|---|---|---|
| RIO Bravo AG10M | RIO Bravo AG10T | 1960x1500x1400 | 1050 | from 900 to 1150 | 95 |
| RIO Grande AG20M | RIO Grande AG20T | 1960x1500x1400 | 1150 | from 900 to 1150 | 99 |

Before

After

acqua&co